

## Specifications

### NKLA22


- \* Stroke Length: 50~1000mm
- \* Color: Grey
- \* Limit Switch: Built-in
- \* Duty Cycle: 10%, max 2min continuous use
- \* IP Grade: IP65/54
- \* Operating Temperature: -26°C~+65°C
- \* Standard: CE
- \* Optional Part: Sphericla plain bearing
- \* Powder Metallurgy Gear




## Load and Speed

Dynamic Load Push(N)	1000	900	800	700	600	400	300	200	100	50
Dynamic Load Pull(N)	1000	900	800	700	600	400	300	200	100	50
Input(VDC)	12/24/36/48									
No Load Speed(mm/s)	3	6	10	13	16	20	26	30	50	80

Speed VS Load

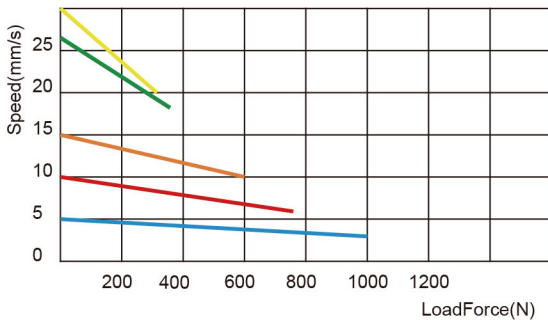

Current VS Load

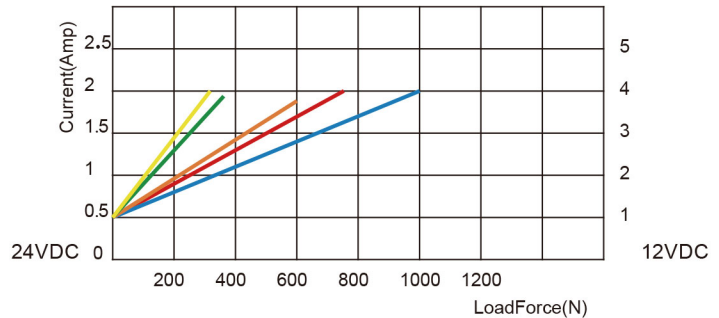

## Dimensions

