

Specifications

NKLA31


- * Stroke Length: 50~1000mm
- * Color: Silver Grey
- * Limit Switch: Built-in
- * Overload Protect: Yes
- * Duty Cycle: 10%, max 2min continuous use
- * IP Grade: IP54/65
- * Operating Temperature: -26°C~+65°C
- * Standard: CE
- * Optional Part: Sphericla plain bearing




Load and Speed

Dynamic Load Push(N)	2000	1600	1000	800	600	400	300
Dynamic Load Pull(N)	2000	1600	1000	800	600	400	300
Input(VDC)	12/24/36/48						
Speed at No Load(mm/s)	3	4	5	7	10	12	15

Speed VS Load

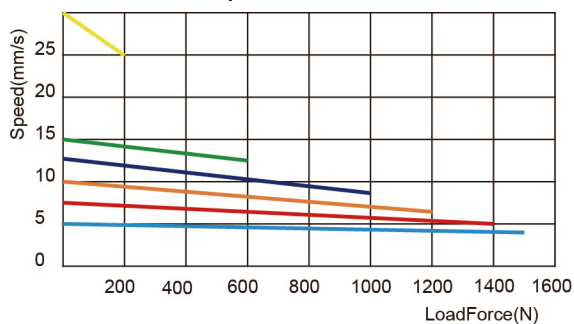

Current VS Load

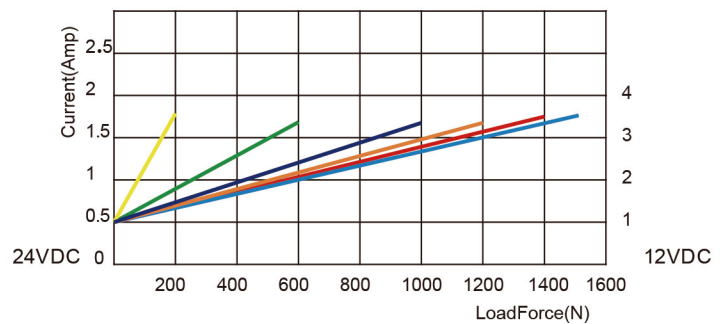

Dimensions

