

Specifications

NKLA43


- * Stroke Length: 50~500mm
- * Color: Black/Silver Grey
- * Limit Switch: Built-in
- * Operating Temperature: -20°C~+45°C
- * Standard: CE
- * Option: Hall sensor
- * Noise: ≤56dB
- * Voltage: 12/24/36/48VDC




Load and Speed

| | | | | | |
|--------------------------|------|------|------|------|------|
| Dynamic Load push(N) | 500 | 2000 | 3000 | 4000 | 6000 |
| Dynamic Load pull(N) | 500 | 2000 | 3000 | 4000 | 6000 |
| Self-lock Push(N) | 1500 | 4200 | 6200 | 8200 | 8200 |
| Input(VDC) | 24 | | | | |
| Speed at Full Load(mm/s) | 48 | 12.5 | 6.5 | 3.0 | 2.0 |
| Load Current(A) | 3.0 | 3.4 | 3.4 | 3.4 | 5.4 |


Current A(12VDC)

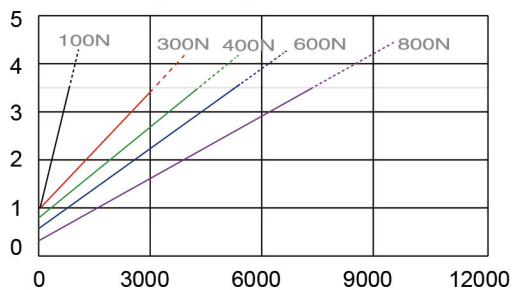


Speed(mm/s)

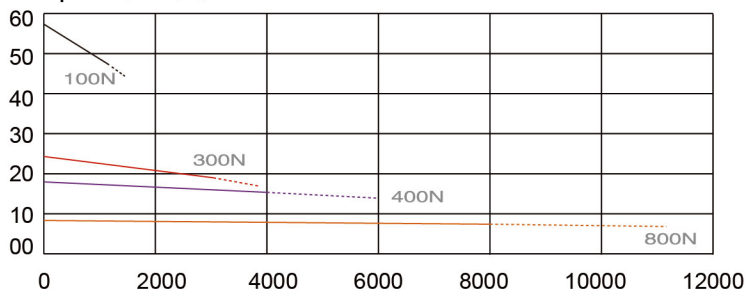

Current A(24VDC)

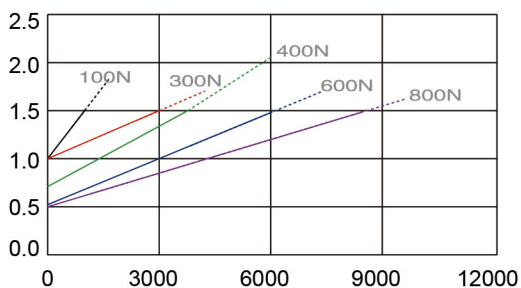



Speed(mm/s)

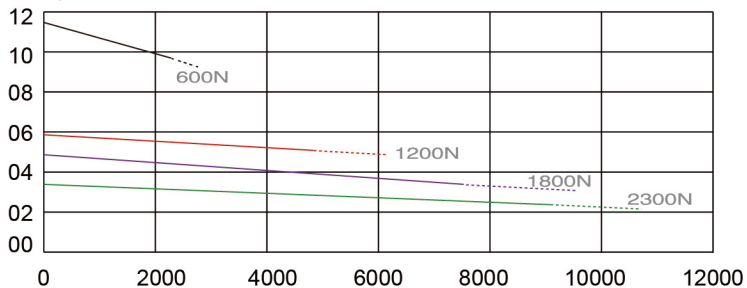

Dimensions

No Overcurrent Protector or Hall Sensor

(mm)

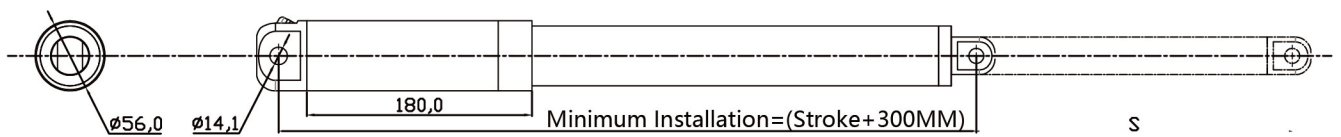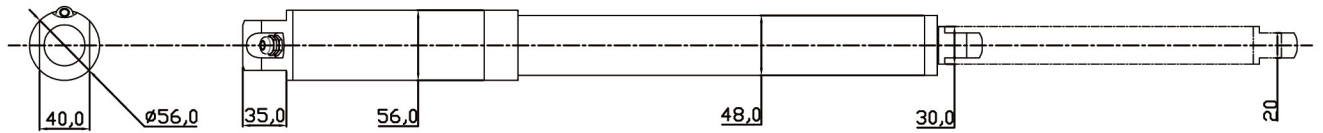

With Overcurrent Protector or Hall Sensor

(mm)

