

Specifications

NKLA103


- * Stroke Length: $800 \pm 7.5\text{mm}$
- * Color: Black
- * Limit Switch: Yes
- * IP Grade: IP66
- * Motor: DC bursh/DC brushless
- * Operating Temperature: $-35^{\circ}\text{C} \sim +65^{\circ}\text{C}$
- * Optional Features: Hall sensor
- * Features: High precision travel feedback function;
Applicable to industrial solar energy line and medical line.



Load and Speed

Dynamic Load push(N)	12000
Dynamic Load pull(N)	12000
Static Load Push(N)	≥ 20000
Static Load Pull(N)	≥ 20000
Input(VDC)	24
Speed at Full Load(mm/s)	$2.2 \pm 10\%$

Dimensions

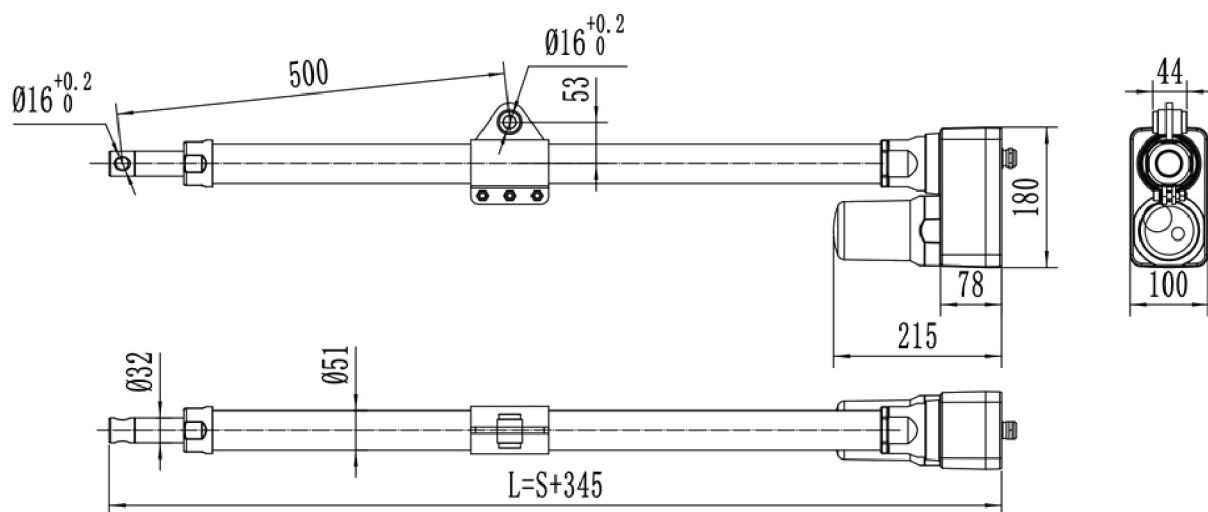

Application chart

