Specifications

NKLA104

* Stroke Length: 100~600mm (Customized acceptable)
* Color: Black
* Overload Protection: Set in the control box
* Motor option: Stepper motor
* Screw: Ball screw
* IP Grade: IP66
* Operating Temperature: -35℃~+65℃
* High precise of positioning and repositioning; Applicable to industrial solar energy line

Load and Speed

Dynamic Load Push at high speed (N)	> 850	Dynamic Load Push at low speed (N)	> 3500
Dynamic Load Pull at high speed (N)	> 850	Dynamic Load Pull at low speed (N)	> 3500
Speed at Full Load(mm/s)	4	Low speed (mm/s)	1.2
Static Load (N)	≥5000		
Input (VDC)	24		

Dimensions

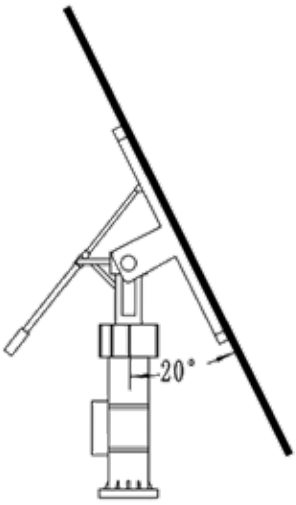
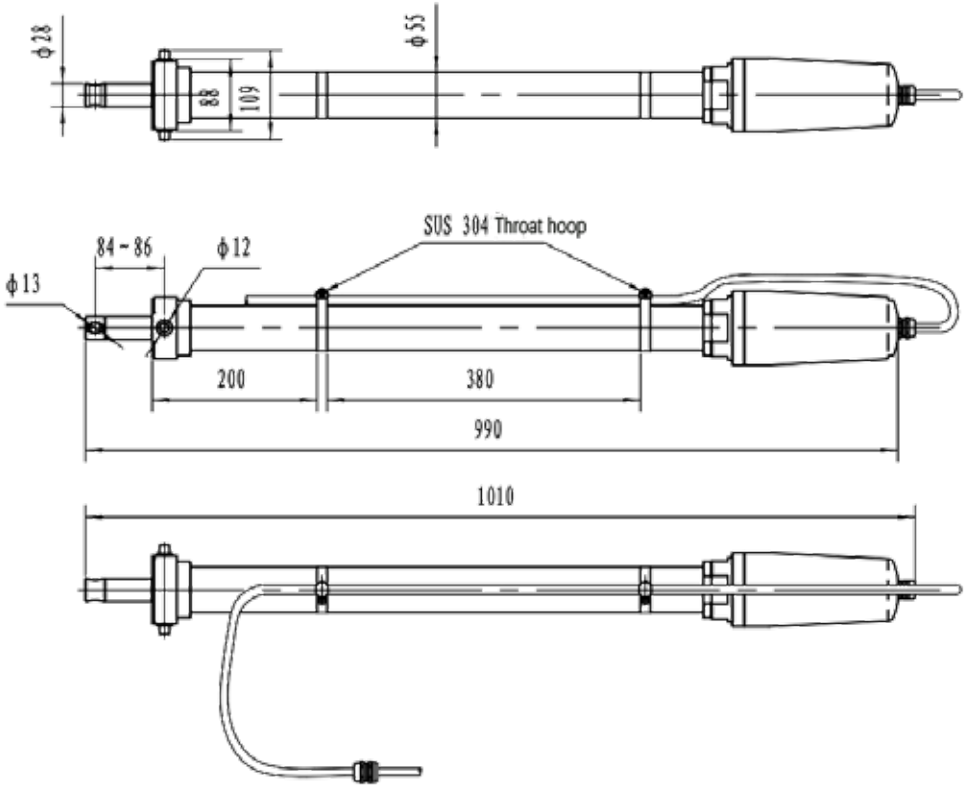
Application chart