

## Specifications

### NKLA105

- \* Stroke Length:  $\leq 1000\text{mm}$
- \* color: Meta
- \* Limit Switch: Build-in
- \* IP Grade: IP66
- \* Operating Temperature :  $-30^{\circ}\text{C}\sim+65^{\circ}\text{C}$
- \* High precise of positioning and repositioning,





Suitable for industrial solar field, tower photothermal solar heliostat


## Load and Speed

Dynamic Load Push(N) (N)	24000	Speed at Full Load (mm/s)	1.5
Dynamic Load Push(N) (N)	50000	Speed at Full Load (mm/s)	0.6
Input (VDC)	24		
Zero-potential Accuracy/ Positional Accuracy (mm)	$\leq 0.2$		
Static Load (N)	$\geq 55000$		
Axial Accuracy (mm)	$\leq 0.6 (\pm 2000\text{N})$		

## Dimensions

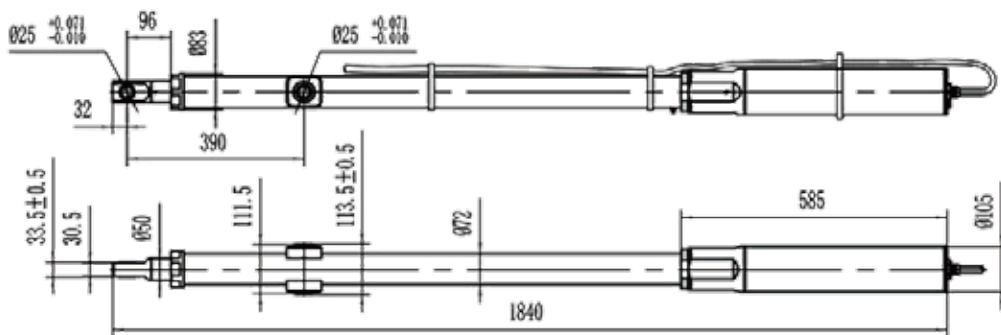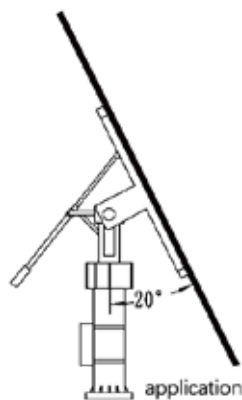

Main linear actuator

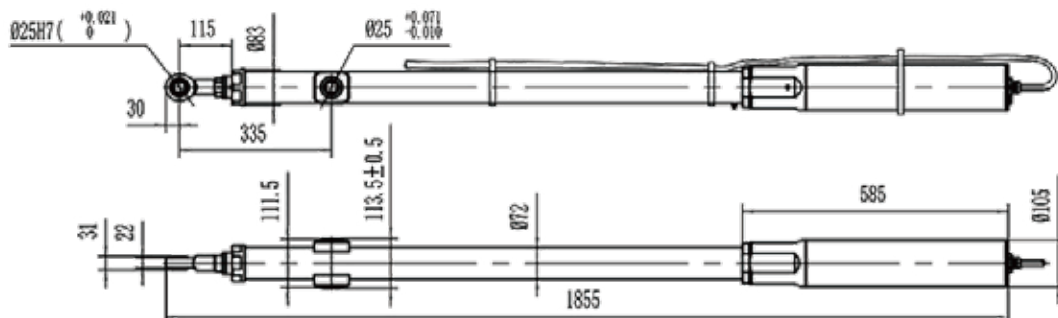

Minor linear actuator