

Specifications

NKLA61


- * Stroke Length: 50~1000mm
- * Color: Black/Silver Grey
- * IP Grade: IP66
- * Operating Temperature: +5°C~+40°C
- * Noise: 45~48dB
- * Optional: Hall sensor; Limit switch
- * Min Installation Size :
stroke+178mm(without hall sensor or overload protect)
stroke+200mm(with hall sensor or overload protect)




Load and Speed

Dynamic Load push(N)	100	300	400	600	800	1200	1800	2300
Dynamic Load pull(N)	100	300	400	600	800	1200	1800	2300
speed ratio	5	14	27	27	27	71	71	139
Input(VDC)	12/24							
Speed(mm/s)	43.0	17.0	14.0	9.0	7.0	5.0	3.0	2.5

Current(A) (12V)

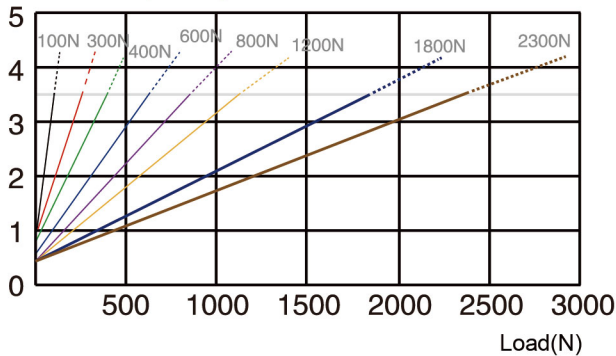

Current(A) (24V)

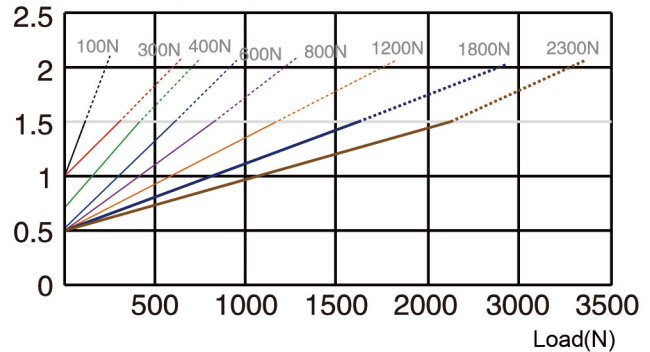

Speed(mm/s)

