

## Specifications

### NKLA66


- \* Stroke Length: 50~400mm
- \* Color: Grey
- \* IP Grade: IP66, waterproof
- \* Operating Temperature: -20°C~+60°C
- \* Noise: 75dB
- \* Option: Hall sensor; Limit switch; Overload protect




## Load and Speed

Dynamic Load push(N)	300	600	1000	1600	2600	3800
Dynamic Load pull(N)	300	600	1000	1600	2600	3800
Self-lock(N)	450	900	1500	2100	3900	5700
Input(VDC)	12/24					
Speed(mm/s)	45	24	16	11	5.5	4


Current ( 12V )

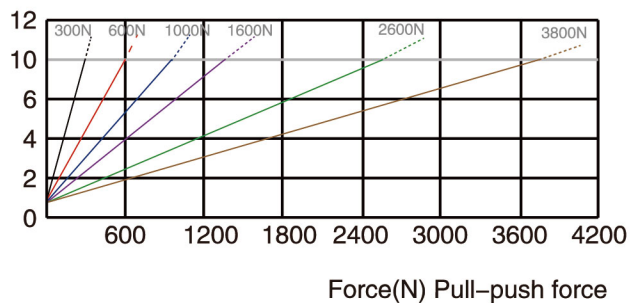

Current ( 24V )

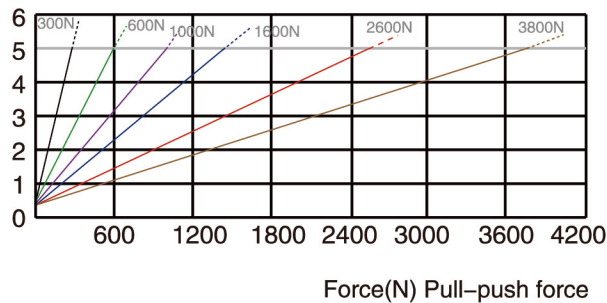


Speed ( mm/s )

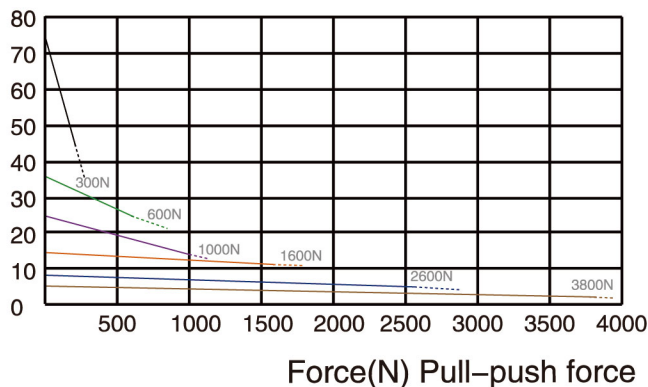

## Dimensions

Standard Size:

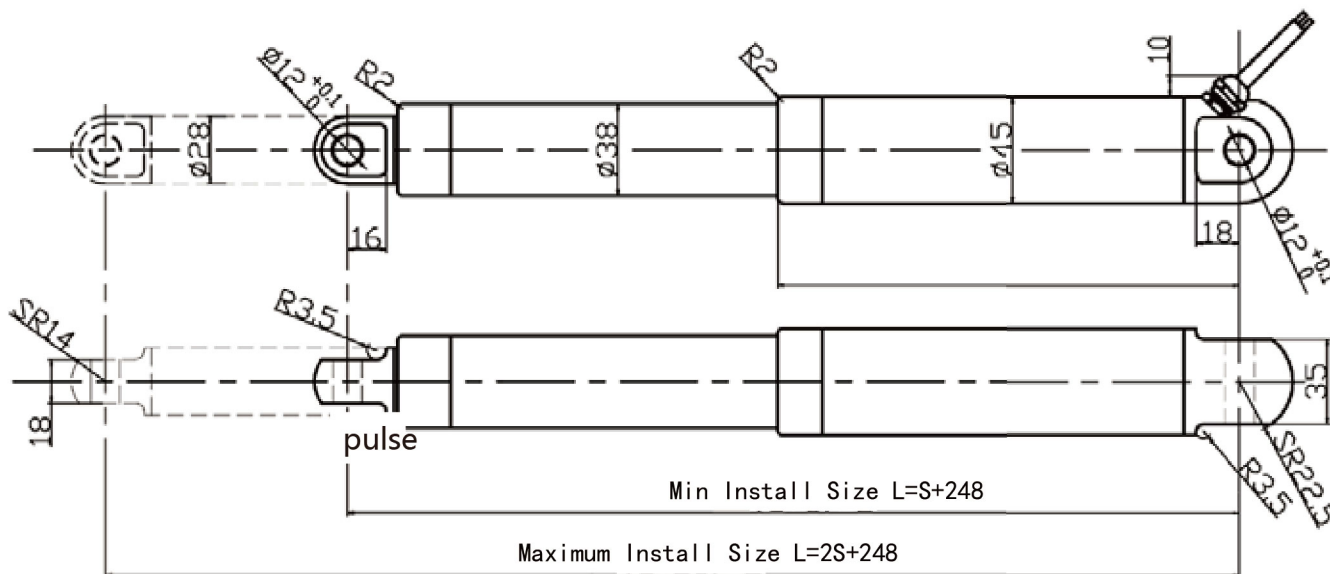

NKLA66 [mm]	[mm]	Standard	Hall sensor	Overcurrent Protector
Min Install Size	L+S	248+S	268+S	268+S
	A	170.5	190.5	190.5