

Specifications

NKLA76


- * Stroke: 50~1000mm
- * Limit Switch: Built-in
- * Overload Protection: Yes
- * IP Grade: IP65
- * Standard: CE
- * Min Install Distance: $L=S+175$
- * Noise: $\leq 55\text{db}$
- * Stainless Steel Material
- * Option: Hall sensor



Load and Speed

| | | |
|----------------------|------|------|
| Dynamic Load push(N) | 300 | 500 |
| Dynamic Load pull(N) | 300 | 500 |
| Input(VDC) | 12 | |
| No Load Current(A) | 0.28 | 0.25 |
| Load Current(A) | 1.4 | 1.5 |
| Input(VDC) | 24 | |
| No Load Current(A) | 0.15 | 0.12 |
| Load Current(A) | 0.7 | 0.8 |
| Load Speed(mm/s) | 8 | 5.2 |
| No Load Speed(mm/s) | 10 | 7 |

Dimensions

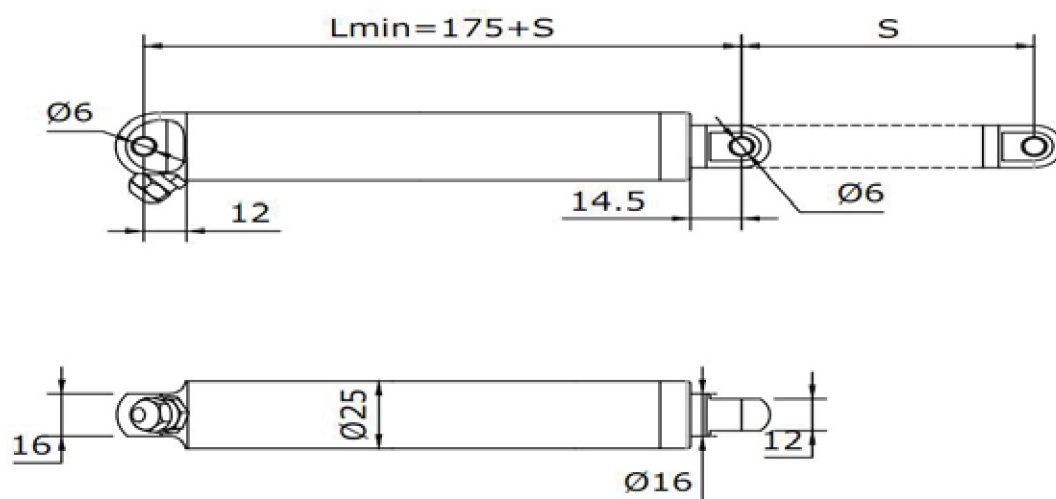

| | | | |
|------|---------|---------|---------|
| 行程 | 30-200 | 201-300 | 301-500 |
| 安装长度 | $S+175$ | $S+195$ | $S+205$ |